



CarryTemp XL6 600L

Conteneur isotherme réfrigérant, amovible et autonome conçu pour le transport de marchandises sous température dirigée dans un véhicule utilitaire.



Désignation Article	Référence Coldanco	Dim. Ext. (mm) L x P x h	Dim. Int. (mm) L x P x h	Dim. Int. utiles* (mm) L x P x h	Volume intérieur (L)	Poids (kg)
CarryTemp XL6 600L	CI-CT-600-CO6	1045 x 800 x 1150	905 x 660 x 1010	905 x 660 x 940	603	30,5

* Sous plateau diffuseur

STRUCTURE

- Conteneur isotherme CarryTemp en panneaux de 60 mm de polyuréthane à fort pouvoir isolant (Lambda 0,02W/mK).
- Isolation enchâssée dans une double housse extérieur/intérieur en toile PVC doublée d'une mousse de polyéthylène.
- Doté d'un plateau en aluminium diffuseur de froid fixé au plafond du caisson pouvant contenir 2 plaques eutectiques GN 1/1.
- Muni de 6 poches internes en filet absorbant pour plaques eutectiques.
- Fermeture de la double porte par système velcro.
- Porte document extérieur format A4.

AVANTAGES

- Dimensionné pour contenir 6 caisses croco de dimensions 600 x 400 x 314.
- Léger, ce conteneur est une solution astucieuse pour transformer de façon temporaire votre véhicule utilitaire sec en véhicule bi-température.
- Robuste, imperméable, lavable et compatible HACCP.



UTILISATION

- Tenue <7°C jusqu'à 10H avec 30 ouvertures de portes.
- Certifié ATP catégorie A (+7°C) et D (0°C).
- Courbes de performances thermiques disponibles sur demande.



CarryTemp XL6 600L

Cooling, removable and autonomous isothermal container designed to transport fresh and frozen goods under controlled temperature in a commercial vehicle.

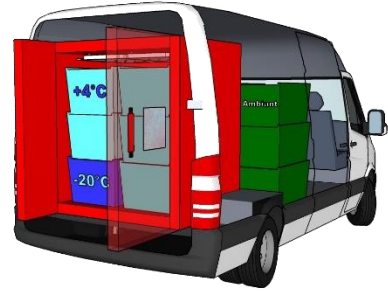

Article Designation	ColdandCo Reference	Ext. Dim. (mm)	Int. Dim. (mm)	Useful* Int. Dim. (mm) L x P x h	Int. Volume (L)	Weight (kg)
CarryTemp XL6 600L	CI-CT-600-CO6	1045 x 800 x 1150	905 x 660 x 1010	905 x 660 x 940	603	30,5

* Under cold diffuser

STRUCTURE

- CarryTemp insulated container made of 60 mm polyurethane panels with high insulating properties (Lambda 0,02W / mK).
- Insulation encased in a double outer / inner cover in PVC fabric lined with polyethylene foam.
- Equipped with a metal cold diffuser plate at top of the container supporting 2 eutectic plates GN 1/1.
- Equipped with 6 internal pockets in absorbent mesh for eutectic plates.
- Closing of the double door by Velcro system.
- A4 document holder.

ADVANTAGES

- Holds up to 6 standard delivery crates measuring 600 x 400 x 314.
- Lightweight, this container is a clever solution to temporarily transform your dry commercial vehicle into a dual-temperature vehicle.
- Robust, waterproof, washable and HACCP compatible.

UTILIZATION

- Successfully tested <7 ° C during 10 hours with 30 door openings.
- ATP certification in category A (+ 7 ° C) and D (0 ° C).
- Thermal performance curves available on request.



Cold & Co
avenue du Maréchal Ney 147,
1180 Bruxelles, Belgique
+32 486 13 25 75

Cold & Co France, Show-Room
10^{ter} Volta 94140 Alfortville, France
ADV +33 (0) 1 53 14 11 15
Serv. Commercial: +33 (0) 7 63 79 17 28

info@coldandco.com
www.coldanco.com